


8620 & 8670 Rocker Switches - 3 Positions 10A 250Vac



- ▶ 3 position miniature rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single & double pole
- ▶ Centre off switching
- ▶ Push on, solder and PCB terminals
- ▶ Matching indicators
- ▶ Bezel size
single: 21 x 15
double: 21 x 24

H8620VB --- H8670VB ---
 T8620VB --- T8670VB ---

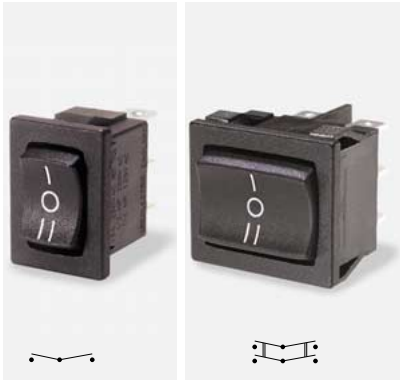

10(4)A 250Vac T90



- UL CSA 15A 277Vac (Single pole)
- UL CSA 250Vac 1/2hp (Single pole)
- UL CSA 125Vac 1/4hp (Single pole)
- UL CSA 10A 277Vac (Double pole)
- UL CSA 125/250Vac 1/2hp (Double pole)
- UL CSA 277Vac 1/2hp (Single & Double pole)
- UL 90°C, file E45221, CSA file LR10990

In house test

10A 28Vdc



RoHS compliant

μ contact gap.
Technical data on pages 4 & 5.

H 8620 V B ---


TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, ETC

▶ TERMINAL	▶ FUNCTION	▶ ROCKER	▶ BODY	▶ OPTIONS
H 4.8 x 0.8 8.5	 8620 ON - OFF - ON Single pole	V Curved 	B Single pole 12.9 Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 15.0 Dim X 19.1/19.2 19.3/19.4 19.7/19.8 21.0	Finish Matt finish only. Colour Call factory for custom colours. A full range is available for large orders. Legend printing Select from the examples or call factory for custom legends. Protective covers IP65 L167 for SP L180 for DP (designed to IP65) Snaps on to body, this reduces maximum acceptable panel thickness to 2.2mm.
T Ø2.15 Solder 6.4	 8670 ON - OFF - ON Double pole		B Double pole 21.9 Panel thickness 0.75-1.24 1.25-1.99 2.00-3.00 24.0 Dim X 19.1/19.2 19.3/19.4 19.7/19.8 21.0	


Cut-outs must be punched in the direction of insertion

Dimensions (mm)


8620VB (H terminals shown)



8670VB (H terminals shown)



8670VB (X terminals shown)



Examples of printing



CL141



CL142