

# 1900 Vandal Resistant Switches - Designed to IP66



3A 250Vac T85



5A 125/250Vac T85 50E3 UL file no. E45221



RoHS compliant by 3rd qtr 2005

Approvals apply to switch mechanism only.  
 μ contact gap.  
 Switching mechanisms are snap action (not sealed).  
 See rating details and technical data on pages 48 & 49.

- ▶ Stainless steel button and bezel
- ▶ Vandal resistant construction
- ▶ Front panel sealed to IP66
- ▶ Single and dual change-over switching



P1911VL ---



P1961VL ---


**P 1911 V L**

TERMINAL FUNCTION ACTUATOR BODY

▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY
<p><b>P</b></p> <p>2.8 x 0.5</p>	<p><b>1911</b></p> <p>ON - ON (momentary 1 side) Single pole</p>	<p><b>V</b></p> <p>Flat top (stainless steel)</p>	<p><b>A</b></p> <p>Stainless steel Chamfer profile bezel</p> <p>Ø19.2 Panel cut-out Panel thickness up to 4.0mm</p>
<p><b>T</b></p> <p>Solder</p>	<p><b>1961</b></p> <p>ON - ON (momentary 1 side) Double pole</p>	<p><b>P</b></p> <p>Domed top (stainless steel)</p>	<p><b>L</b></p> <p>Stainless steel Chamfer profile bezel</p> <p>Ø16.0 Panel cut-out Panel thickness up to 4.0mm</p>
<p><b>X</b></p> <p>PCB</p>			

## Dimensions (mm)

Single pole (P1911VA shown)

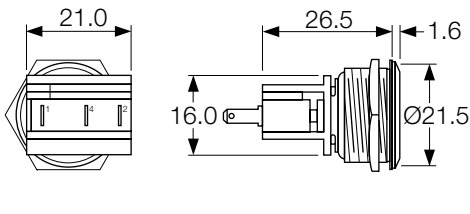

Double pole (P1961VL shown)

