

Safety Cut-out Switches 16A 250Vac



- ▶ Safety cut-out switches
- ▶ Ratings up to 16A, 250V ac
- ▶ Snap action switches
- ▶ NC contacts
- ▶ Pendulum or lever tilt operation

Safety requirements for Portable Heaters can be met by the fitting of a safety cut-out switch. The heater will then turn off if overturned.



C0320AA
15A 125/250Vac UL file no. E91274



C0320BB
16A 125/250Vac T85 50E3
16A 250Vac 3/4hp T85 125Vac 1/2hp UL file no. E45221



RoHS compliant by 3rd qtr 2005



μ contact gap.

C0320AA - - -
TERMINAL FUNCTION ACTUATOR MOUNTING



ORDER CODE	TERMINAL	FUNCTION	ACTUATOR	MOUNTING
C0320AA		 ON - OFF (momentary OFF)		
C0320BB		 ON - OFF (momentary OFF)		

Dimensions (mm)

C0320AA

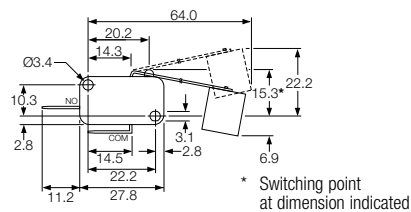

C0320BB



Switch actuating point 40° in any direction off vertical