

3140 Refrigerator Door Switches *Splashproof*



5A 250Vac 25T85 5E4 (50,000 Operations)



UL CSA 5A 250Vac
UL 85°C, file E45221, CSA file LR10990

In house test


200W 250Vac Lampload (400,000 operations)



RoHS compliant

3141, μ contact gap.
3145 and 3146, 3mm contact gap.
Technical data on pages 4 & 5.
Sealed terminals option available. Call factory for details.

- ▶ Door switches
- ▶ Ratings up to 5A, 250V ac
- ▶ Splashproof
- ▶ Momentary action
- ▶ Choice of actuators
- ▶ 2 circuit switch

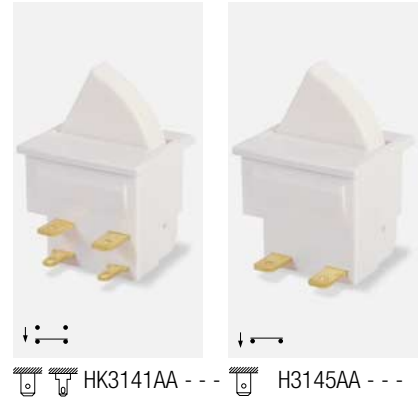

HK 3141 A A - - -

TERMINALS FUNCTION ACTUATOR BODY COLOUR, ETC

TERMINAL	FUNCTION	ACTUATOR	BODY	OPTIONS
<p>H</p> <p>4.8 x 0.8</p> <p>Standard format is H terminals in positions 1 & 2 and K terminals in positions 3 & 4</p> <p>For sealed terminals call the factory</p>	<p>3141</p> <p>ON - ON (momentary)</p> <p>3145</p> <p>ON - OFF (momentary OFF)</p> <p>3146</p> <p>ON - OFF (momentary ON)</p>	<p>A</p> <p>B</p> <p>C</p> <p>D</p>	<p>A</p> <p>Panel cut-out Panel thickness 1.0 - 2.5mm</p>	<p>Finish Gloss finish only</p> <p>Colour White is standard</p> <p>Call factory for custom colours. A full range is available for large orders.</p>
<p>K</p> <p>2.8 x 0.8</p>				

Dimensions (mm) ("A" actuator shown)

3141 uses terminals 1,2,3,4

3145 uses terminals 3,4

3146 uses terminals 1,2

For details of actuator travel and switching angles call the factory.

