

# LED Lamps and LED Lampholders - Designed to IP66

LED Lampholders can be supplied with or without LEDs


**Colours:** Red, Yellow Green and Blue LEDs.  
(High Intensity is standard. Option of extra super bright).

**Voltages:** LEDs are available for direct connection to 2.0/2.2V or 12Vdc.  
For other voltages contact the factory.

**To create a catalogue number:**

Refer to the 2 columns below (terminal and type), then state: LED colour and voltage and body finish (Black or Chrome).

- ▶ IP66 front bezel sealing
- ▶ LED lampholders
- ▶ Supplied with or without LEDs
- ▶ Black or Chrome finish

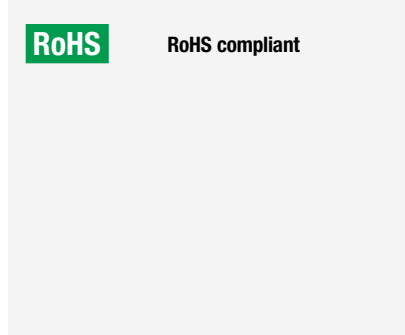

TERM	TYPE	PANEL & °C	DIMENSIONS (mm)	
<b>W</b> LED fitted	<b>(W) 1048 OA</b> Designed to IP66  5mm LED	8.0 5.5max T85		
<b>A</b> LED not fitted				
<b>L</b>  LED & Wires fitted	<b>L 1048 OA</b> Designed to IP66  5mm LED	8.0 5.5max T85		
<b>W</b> LED fitted	<b>(W) 1050 OA</b> Designed to IP66  5mm LED with focusing reflector	8.0 7.0max T85		
<b>A</b> LED not fitted				
<b>L</b>  LED & Wires fitted	<b>L 1050 OA</b> Designed to IP66  5mm LED with focusing reflector	8.0 7.0max T85		

**Properties**

**Sealing**

O-ring sealing equivalent to IP66, of both the LED to bezel, and bezel to panel is available where shown.

**Polarity**

The nylon base mouldings are polarity marked.

**Body Material and Finish**

Chromed brass or Black oxide coated brass.

**Lampholders only**

Items prefixed 'A' are supplied without LEDs.

**LED wires or PVC covered wire leads**

125mm min length wires, 6.3mm standard strip.  
Alternative colours, length and strip available.