

# 1500 Twin Units Switches and Indicators 16A 250Vac



- ▶ Twin unit rocker switch
- ▶ Choice of switching circuits including 3 position
- ▶ Push-on, solder and PCB terminals
- ▶ Choice of bezel styles
- ▶ Choice panel cut outs
- ▶ Matching indicator
- ▶ Single pole
- ▶ Splashproof option
- ▶ Bezel size 'A' style 30.2 x 25.0



**16(4)A 250Vac T125**



**UL CSA 16A 250Vac**  
**UL CSA (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp**  
**UL 85°C, file E45221, CSA file LR10990**

*In house test*

**Inrush 36A to EN61058-1 & 20A 28Vdc**

For versions with High Inrush or for 50,000 operations, see pages 20 and 26.



**RoHS compliant**


3mm contact gap except where marked  $\mu$ .  
 Technical data on pages 4 & 5 (switches), 66 (indicators).  
 For twin units repeat the order details for both the left and right sides.

**C 1500 A / C 1510 A L ---**

TERMINAL    FUNCTION    ROCKER    TERMINAL    FUNCTION    ROCKER    BODY    PRINT, COLOUR, ETC

TERMINAL	FUNCTION	ROCKER
<p><b>C</b></p> <p>6.3 x 0.8</p>	<p>Approvals &amp; ratings vary with function                      ON OFF Switches - ON when pressed over terminal 1 or 4</p>	<p><b>A</b> Softline (Matt)</p>
<p><b>H</b></p> <p>4.8 x 0.8</p>	<p><b>1500</b>    ON - OFF</p>	<p><b>B</b> Softline splashproof (Matt)</p>
<p><b>K</b></p> <p>2.8 x 0.8</p>	<p><b>1510 <math>\mu</math></b>  <small>HP rating N/A</small></p> <p>ON - ON</p>	<p><b>W</b> Curved splashproof (Matt)</p>
<p><b>T</b></p> <p><math>\varnothing 2.1</math></p> <p>Solder</p>	<p><b>1520 <math>\mu</math></b>  <small>125V &amp; 250V 1/2 HP                      H terminal rated T100 only</small></p> <p>ON - OFF - ON</p>	<p><b>X</b> Two colour (Matt) (not momentary)                      ON - OFF only</p>
<p><b>X</b></p> <p>4.0</p> <p>PCB 0.8Sq</p>	<p><b>0430</b>  <small>X terminal N/A</small></p> <p>Indicator                      Technical data on page 66</p>	<p><b>A</b> Softline lens (Matt) (Indicator)</p>

## Enhanced Splashproofing

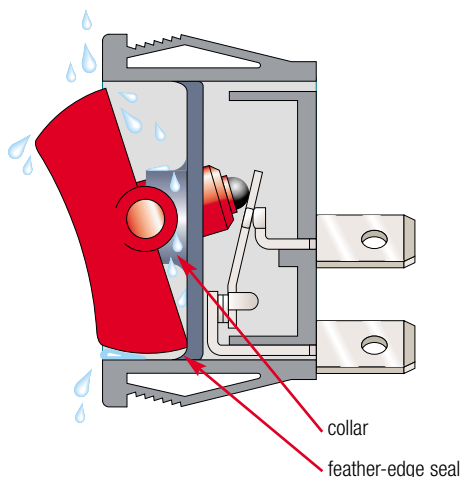

### 1500 W and B splashproof options

Feather edge seals and a close fitting collar protect current carrying parts from moisture.

B option has Hytrel collar/seals for enhanced protection.



C1500A/C1500AL



C1500A/C0430AL



C1500X/C1500XL



C1520A/C1510AL









C1500A/C1520AL



C0430A/C0430AL

## BODY

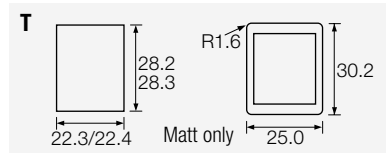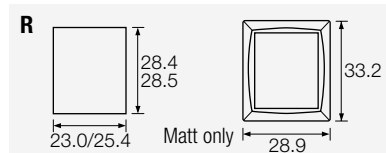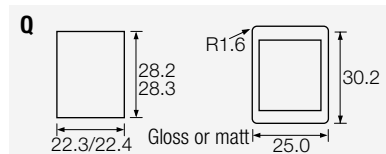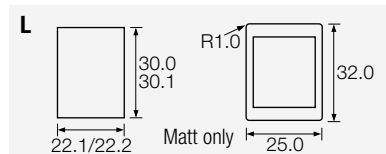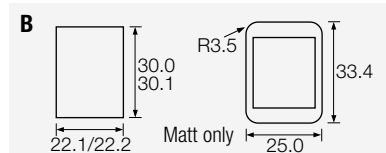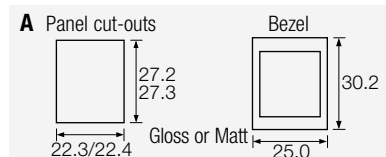

Cut-outs must be punched in the direction of insertion

## OPTIONS

**Finish** Matt is standard.


**Colour** Call factory for custom colours. A full range is available for large orders.

**Legend printing** Call factory for custom legends. State if a legend is to appear on the left or right hand unit (viewed from the front).

**Lamp voltage** Call factory for details.

For all options call the factory.

## DIMENSIONS (mm)



Call the factory for terminal spacing details

### Panel thickness

<b>A,Q</b>	0.75 to 3.3mm
<b>L,B,T</b>	0.75 to 2.5mm
<b>R</b>	0.75 to 3.0mm

### Twin unit terminal numbering

The first 6 digits of the catalogue number refer to the left hand unit when looking at the front. (This has terminal nos. 4, 5 & 6).

### Examples of printing



EN602A



EN730