





Indicator Lights (Neon, LED and Filament Lamp)


Colours and voltages:

-  **Neon** Available with Red, Amber, Green or Clear lenses
100/130V (marked 110V), 200/250V (marked 230V)
-  **LED - DC** Red, Yellow, Green, Blue, White
2.0/2.2V Resistors for other voltages available.
-  **LED - AC** Red, Yellow, Green, Blue, White
110-230V ac operation.
-  **Filament lamp** Available with Red, Amber, Green, Clear or Blue lenses
6V, 12/14V, 24/28V.

- ▶ Neon, LED, mains LED or filament lamp
- ▶ Bezel sizes from 6.7 to 16.3mm dia
- ▶ Red, amber, green and clear lenses
- ▶ Red, yellow, green, blue and white LEDs
- ▶ Wide choice of styles







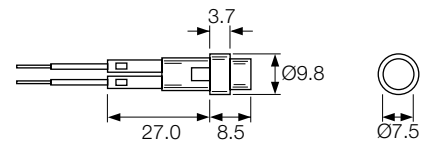





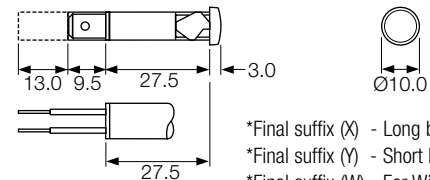





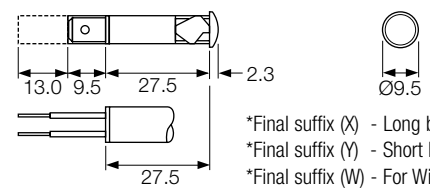






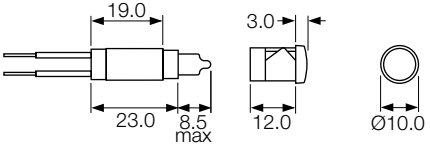






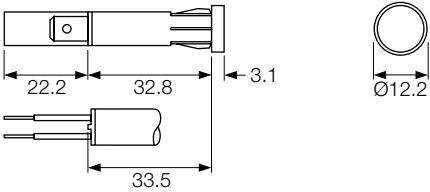






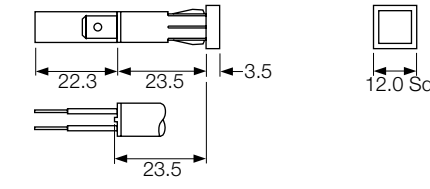
To create a catalogue number:


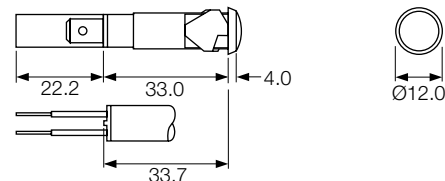

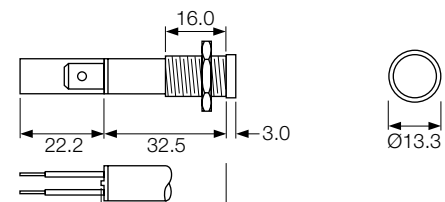

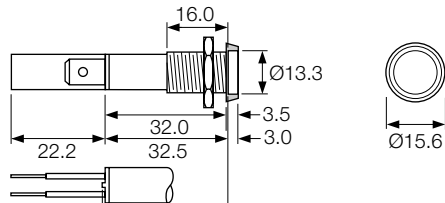

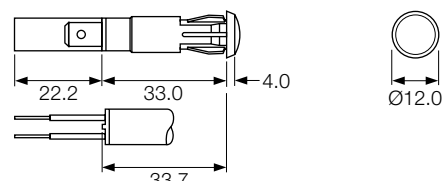

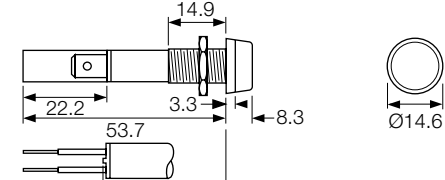

Refer to the 2 columns below (terminal and type), then state: Lens colour, voltage and whether neon, LED or filament lamp



UL file E63363
CSA file 1279633 / LR29381[®]
Approvals shown for neon versions only

RoHS RoHS compliant

TERM	TYPE	PANEL & °C	ILLUMINATION OPTIONS	DIMENSIONS (mm)
L	L 2951 00 Chrome bezel available 	8.0 0.8-1.6  page 66	   	
L K 2.8 H 4.8	(H) 0568 A(*) Deep lens profile 	8.0 0.8-3.5  page 66	  	 *Final suffix (X) - Long barrier *Final suffix (Y) - Short barrier *Final suffix (W) - For Wires
L K 2.8 H 4.8	(H) 0568 B(*) Shallow lens profile 	8.0 0.8-3.5  page 66	  	 *Final suffix (X) - Long barrier *Final suffix (Y) - Short barrier *Final suffix (W) - For Wires
L	(L) 0569 AW 	9.0 0.8-2.5  Call factory	   	
L K 2.8 H 4.8 C 6.3	(C) 0273 00 	9.0 2.0 max  page 66	   	
L K 2.8 H 4.8 C 6.3	(C) 0278 00 	9.0 2.0 max  page 66	   	

TERM	TYPE	PANEL & °C	ILLUMINATION OPTIONS	DIMENSIONS (mm)
L K 2.8 H 4.8 C 6.3	(C) 0276 AA 	9.5 0.8-2.8 page 66	DC AC	
L K 2.8 H 4.8 C 6.3	(C) 0275 00 	10.0 12.0 max page 66	DC AC	
L K 2.8 H 4.8 C 6.3	(C) 0275 00 Chrome bezel 	10.0 11.5 max page 66	DC AC	
L K 2.8 H 4.8 C 6.3	(C) 0276 00 	10.0 2.8 max page 66	DC AC	
L K 2.8 H 4.8 C 6.3	(C) 0277 00 Chrome bezel 	10.0 12.0 max page 66	DC AC	
L K 2.8 H 4.8 C 6.3	(C) 0273 LL 	10.0 0.6-2.0 page 66	DC AC	For sub-panel mounting, behind a fascia. 